


HIGH-PRESSURE SHUT-OFF GLOBE VALVE V10

PN 100 (1.0565), 160 (1.4571); DN 6–15; T_{MAX}: 600 °C

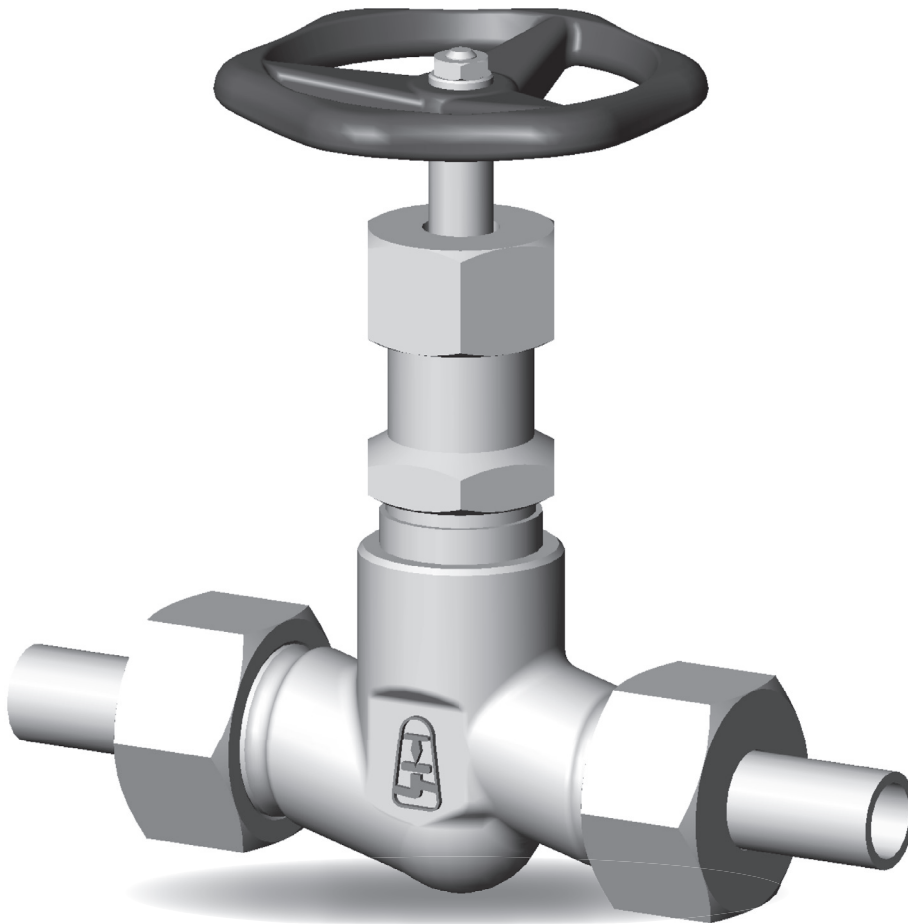

HIGH-PRESSURE SHUT-OFF GLOBE VALVE V10

APPLICATION

- water, steam, gases, oils, petroleum products, non-aggressive and aggressive substances

CONNECTION

- weld ends, branch, union nut

OPERATION

- handwheel

DESCRIPTION

- high-pressure forged globe valve
- rotating rising stem
- straight or angle pattern body shape (angle body only for PN 160)
- shut-of cone
- conical seat
- sealing surfaces are welded by hard steel
- complies with the requirements of the directive 2014/68/EU, EN 13 709
- testing is carried out according to EN 12266-1

BASIC DESIGN OPTIONS

- connecting dimensions according to customer requirements
- other testing to customer requirements
- according to TRD 201

